

SPECYFIKACJA PRODUKTU 5HP24

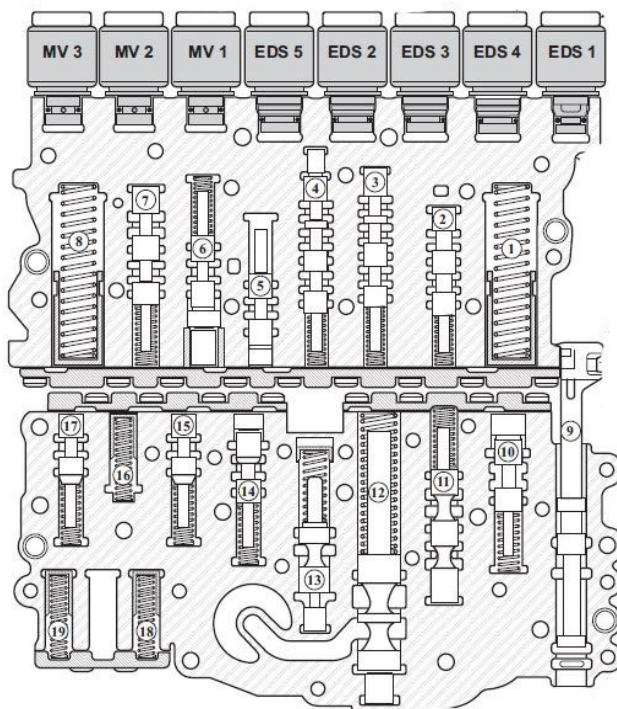


Tabela elektrozaworów:

<i>Solenoid</i>	<i>Case Connector Pin Numbers</i>		<i>Resistance In Ohms</i>
	-	+	
MV 1	8 and 12		30 - 34 Ω
MV 2	9 and 12		30 - 34 Ω
MV 3	4 and 12		30 - 34 Ω
EDS 1	2 and 12		5.2 - 6.8 Ω
EDS 2	3 and 12		6.2 - 7.8 Ω
EDS 3	7 and 12		6.2 - 7.8 Ω
EDS 4	11 and 12		6.2 - 7.8 Ω
EDS 5	15 and 12		6.2 - 7.8 Ω
TOT	13 and 14		1000 Ω at 25° C
TSS	1 and 10		292 - 358 Ω
OSS	5 and 6		292 - 358 Ω

